


Model	ER17/50
System	Li-Thionyl Chloride/Inorganic Electrolyte
Nominal Voltage (V)	3.6
Nominal Capacity (mAh)*	2,750
Nominal Discharge Current (μA)	125
Operating Temperature Range (deg. C)	-55 to +85
Weight (g)**	20
Dimensions (mm)**	
Diameter	17
Height	52.6
UL Recognition	MH12568
(Technician Replaceable)	

Available Terminals and Wire Connectors


Check http://biz.maxell.com/products/industrial/battery/er/pdf/er17-50tw_11e.pdf for diagrams of batteries with terminals.

Characteristics


● Discharge Characteristics

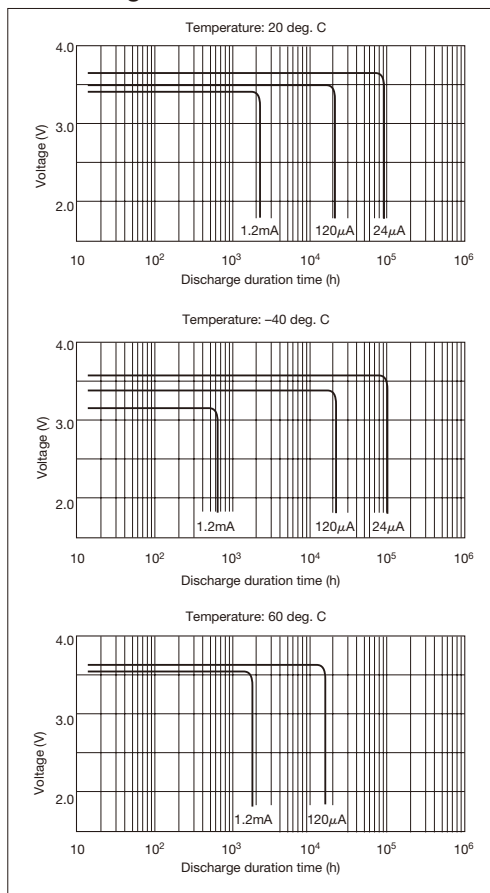

● Relationship between Discharge Current and Duration Time

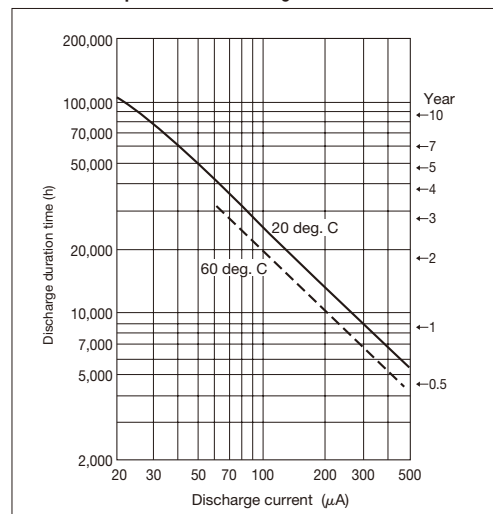

● Storage Characteristics

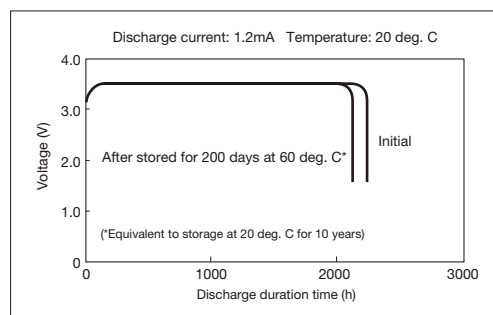

* Nominal capacity indicates duration until the voltage drops down to 3.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.