


# TITUS™ ER34615

**Bobbin Construction Size D  
Primary Lithium Thionyl Chloride  
UL, CE , ATEX Compliant**

Specifications (typical values stored @ 20°C for one year)

Nominal capacity (@ 2mA / 2.0V cut-off / 20°C)	<b>19Ah</b>
Nominal Voltage	<b>3.6V</b>
Maximum continuous discharge current (Higher current can be available upon consulting)	<b>230mA</b>
Maximum pulse current capability <sup>1</sup>	<b>400mA</b>
Lithium metal content	
Weight	<b>105g max</b>
Volume	<b>56.5cm<sup>3</sup></b>
UL Approval	<b>MH 29130</b>
Operating temperature	<b>-55°C / +85°C</b>

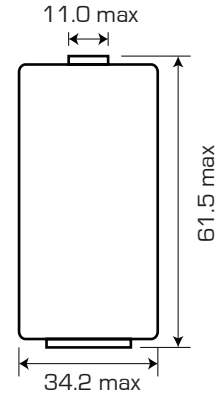


### Storage condition


Please store batteries at clean, cool (not over +30°C), dried (less than 30% RH) and ventilated condition

<sup>1</sup> Maximum Pulse capability reading over 3.0V @ 230mA every 2 minutes @ +20°C. The pulse capability can be different to the cell status, environment. For max pulse coverage, capacitor support is recommended



### Discharge characteristics @ 23°C

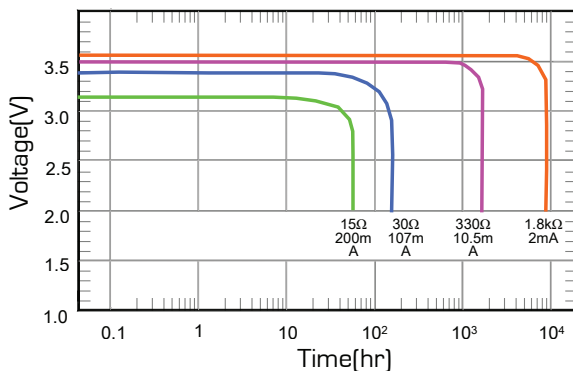

### Capacity vs Current

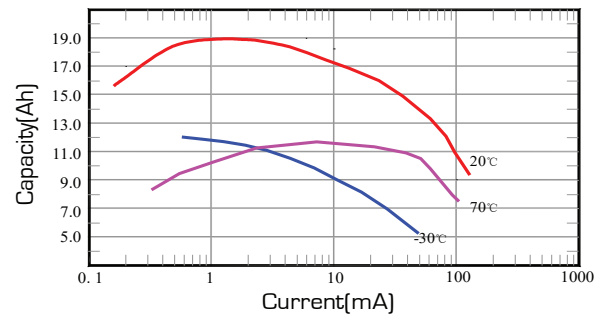

### Voltage vs Temperature

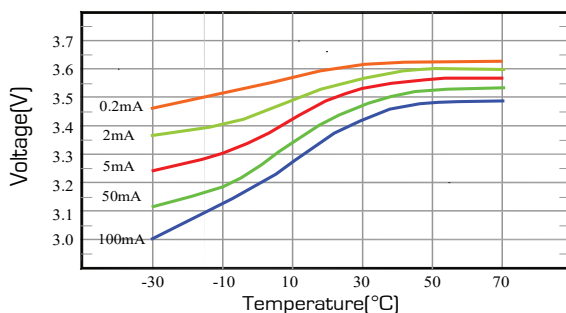

Also available :  
AX = Axial (45mm) , CW = lead wire

### WARNING

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate or expose contents to water

**TITUS™  
BATTERY**

Distributed by :  
2B Elettronica srl  
Via Aurelia 424 - 00165 - Roma

Tel +39 06 6622432  
Fax +39 06 6632956  
Email : info@2belettronica.it  
web : www.2belettronica.it

