

# MODEL TL-2186



International size reference: ER22G75

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 0.5 mA, to 2V	0.40 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	10 mA
■ Maximum pulse current capability	20 mA
■ Weight	5.7g (0.201 oz)
■ Volume	1.35 cc
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition MH 12193	

# TADIRAN LITHIUM BATTERIES

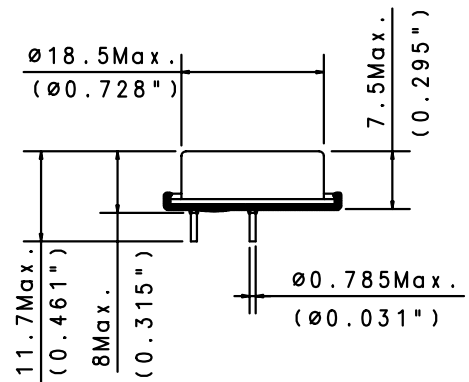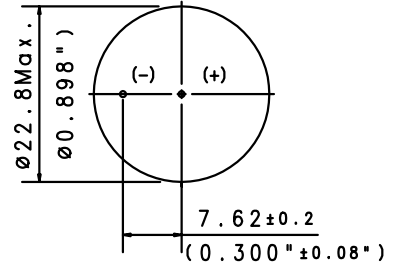

### ADDITIONAL INFORMATION

SUFFIX- /P                      TIN PLATED NICKEL PINS  
CATALOGUE NO.:                      15-5186-43500

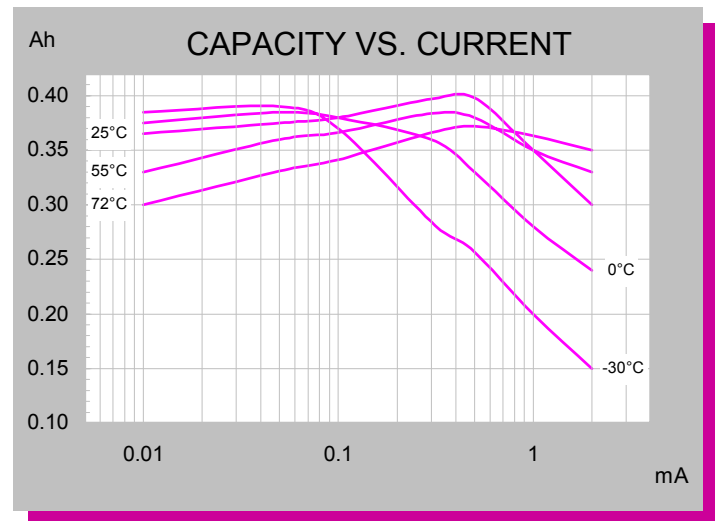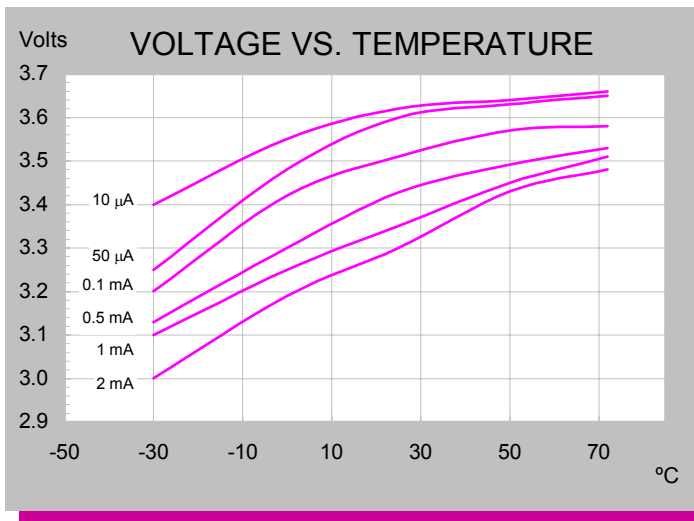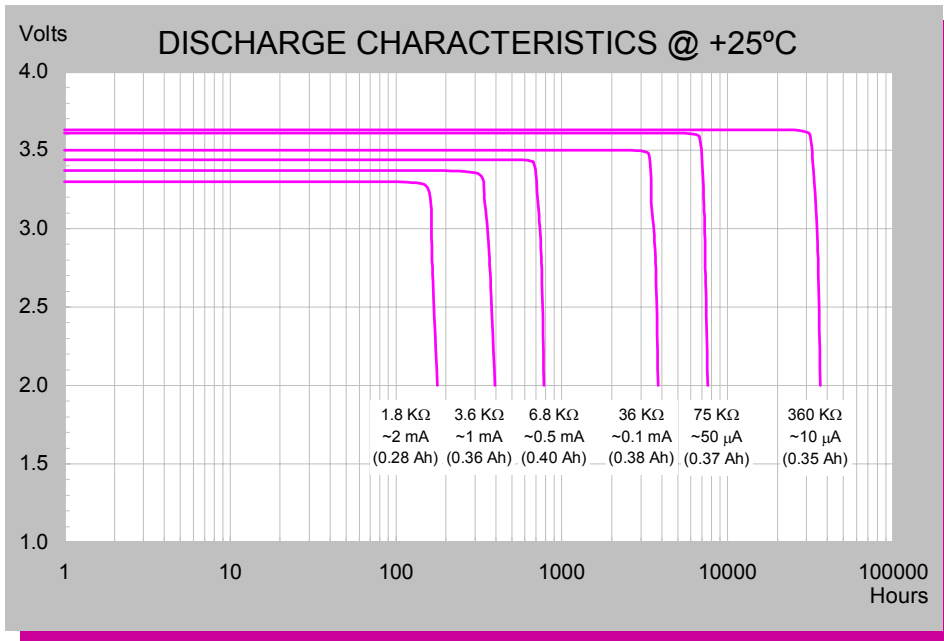

## LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 05/03